

BDT 010-RC drive



Performance features

- » For opening and closing the activPilot Comfort PADM turn-tilt fitting with parallel action from Winkhaus
- » Flexible window operation via wireless remote control or touch surface
- » Selection of various automatic functions using touch control
- » Automated, user-independent and energy efficiency ventilation in accordance with DIN 1946-6
- » Wireless receiver with security encryption and code hopping principle
- » Particularly quiet function
- » High-quality design for harmonious integration in modern architecture
- » High-quality metal front panel
- » Window swivel function at the push of a button
- » Drive for DIN left or DIN right window

Accessories

Operation elements




Power supply unit



Technical data

Supply	24 V DC / $\pm 15\%$ / 1 A
Duty cycle	30 %
Torque	10 Nm
Rotation angles	90° / 180°
Service life	> 40000 double strokes
Type of protection	IP 40
Temperature range	-5 °C ... +60 °C
Transmitting power	approx. 1 mW (e.r.p)
Transmitter range	50 m
Housing	ABS-PC / Die-cast zinc
Surface	Painted
Connection	Plug-in screw terminal
W x H x (D) in mm	48 x 205 x 45
Weight	0.75 kg

Dimensions

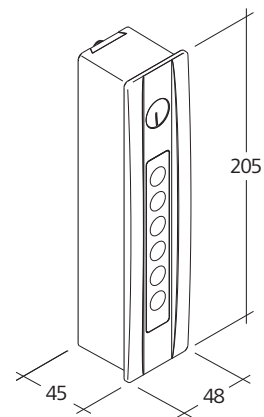

All specifications in mm

Design

Type	Art. No.	Colour
BDT 010-RC (WH/WH)	24.000.31	White / White (~ RAL 9016 / ~ RAL 9016)
BDT 010-RC (WH/SR)	24.000.32	White / Silver (~ RAL 9016 / ~ RAL 9007)
BDT 010-RC (GY/SR)	24.000.33	Grey / Silver (~ RAL 7021 / ~ RAL 9007)