


SNT 1-U CNV power supply unit

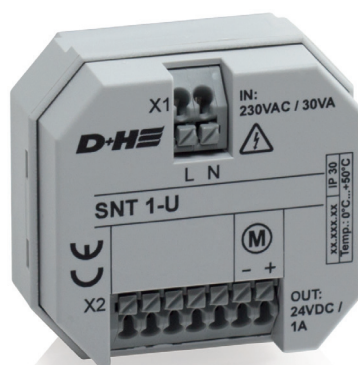

Performance features

- » External ventilation power supply unit, 230 V AC
- » For BDT 010-RC power supply
- » Option for connecting to a maximum of one BDT 010-RC
- » Up to 1 A total drive current
- » Activation, e.g. using 230 V AC ventilation button
- » For installing in 55 mm flush-mounted socket (not included)

Accessories

Operation elements




BDT



Sensor systems



Example of application

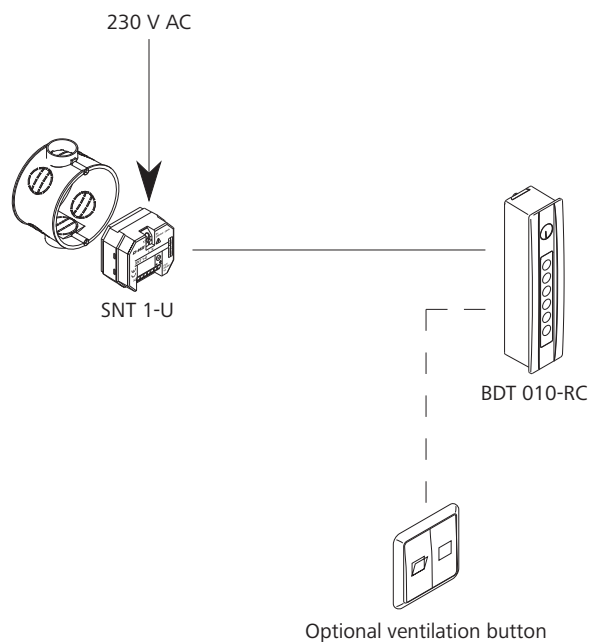

Technical data

Supply	230 V AC / 50 Hz / 30 VA
Output	24 V DC / max. 1 A
Mode of operation	Short-time duty 20 % duty cycle
Type of protection	IP 30
Temperature range	0 °C ... +50 °C
Housing	Plastic
Colour	Light grey (~ RAL 7035)
W x H x (D) in mm	50 x 48 x 28
Weight	0.13 kg

Design

Type	Art. No.
SNT 1-U	20.032.40

SNT 2 CNV power supply unit



Performance features

- » External ventilation power supply unit, 230 V AC
- » For controlling 24 V DC drives
- » Up to 2 A total drive current
- » Activation, e.g. using 230 V AC ventilation button
- » Surface-mounted design

Accessories

Operation elements




CNV drives



Sensor systems



Example of application

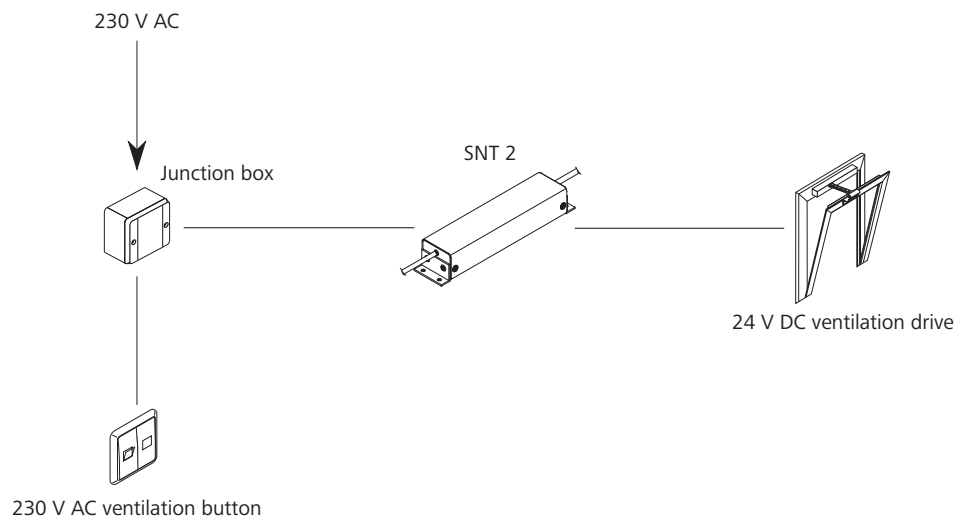

Technical data

Supply	230 V AC / 50 Hz / 110 VA
Output	24 V DC / max. 2 A
Mode of operation	Short-time duty 20 % duty cycle
Type of protection	IP 50
Temperature range	0 °C ... +60 °C
Housing	Aluminium
Colour	Silver (~ RAL 9006)
W x H x (D) in mm	232 x 50 x 40
Weight	0.80 kg

Design

Type	Art. No.
SNT 2	20.031.60